Since 1968

COMMAX
SmartHome & Security

Manual de usuario

ESTACION PUERTA DR-2GN / 2GNR




www.commax.com

COMMAX Co.,Ltd.

- Gracias por comprar productos COMMAX.
- Lea atentamente esta Guía del usuario (en particular, las precauciones de seguridad) antes de usar un producto y siga las instrucciones para usar un producto exactamente.
- La empresa no se hace responsable de ningún accidente de seguridad causado por un funcionamiento anormal del producto.

1. Información general

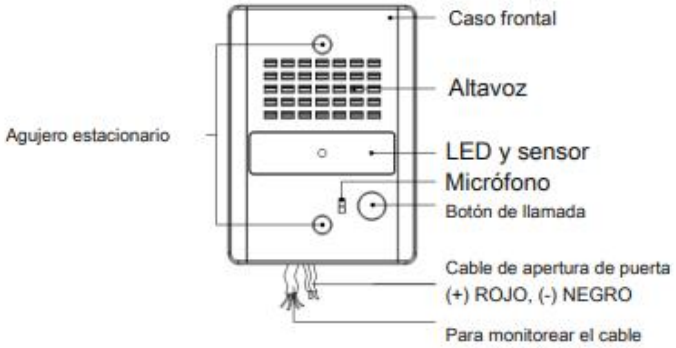



3. Especificación

MODELO	DR-2GN / 2GNR
Sistema de cableado (hogar)	Sistema de 2 cables para portero automático (no polar)
Método de comunicación	Duplex completo
Voltaje nominal	9V ⎓ (Suministrado desde el teléfono de la puerta)
Temperatura de funcionamiento	- 10 ° C ~ + 40 ° C
Dimensiones (mm)	93,5 (ancho) x126 (alto) x18 (profundidad) mm
Distancia de comunicación	280g
Peso (gramos)	170g

2. Cableado e instalación

1. Conecte los cables de la estación Room como se muestra en la figura (polaridad con cuidado)
2. Conecte el cable de apertura de la puerta como aparece en la figura.
   (aplicado solo para DR-2GNR)
3. Verifique si el sistema funciona.

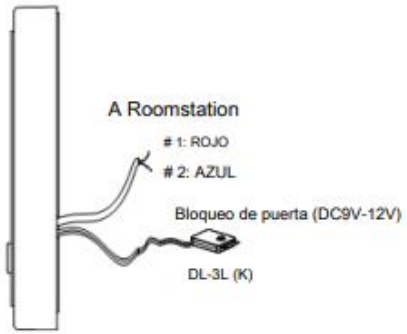


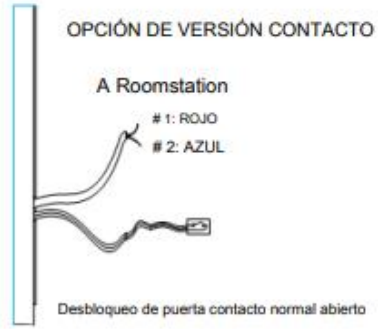


4. Si no hay un agujero en la pared, puede colocar el cable en la ranura alrededor de la carcasa como se muestra en la figura.

5. Coloque el sistema en la pared y móntelo con los tornillos suministrados.

<En caso de quitar la tapa>

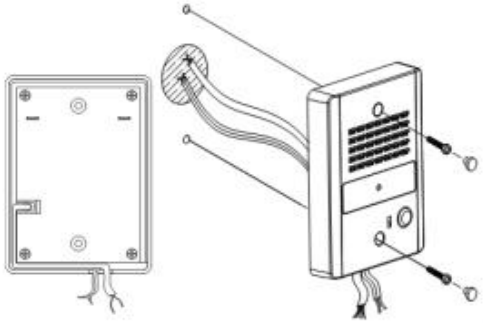

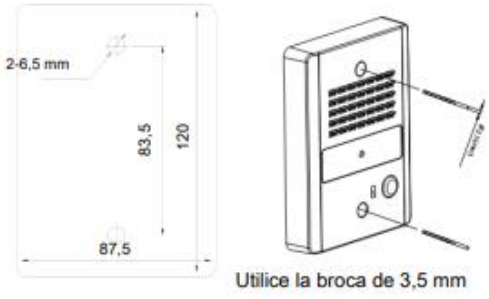

Utilice la broca de 3,5 mm

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Departamento de Negocios Internacionales de Corea: Tel .; + 82-31-7393-540 ~ 550 Fax .; + 82-31-745-2133 Sitio web: www.commax.com

PM132GN00010

Impreso en Corea / 2016.06.105

Since 1968

COMMAX
Smart Home & Security

User Manual

DOOR PHONE DP-2S



www.commax.com

COMMAX Co.,Ltd.

COMMAX

- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

1. Warnings and Caution

To prevent fire or shock hazard, do not expose the unit to rain or moisture.

This symbol is intended to alert the use to the presence of uninsulated **"dangerous Voltage"** within the product' s enclose that may be of sufficient magnitude to constitute a risk of electric shock to persons.


This symbol is intended to alert the use to the presence of important operating and maintemance (servicing) instructions in the literature accompanying the appliance

caution

Risk of electric shock
do not open

CAUTION : To reduce the risk of electric shock, do not remove cover(or back) no user-serviceable part inside refer servicing to qualified service personnel.

2. Overview

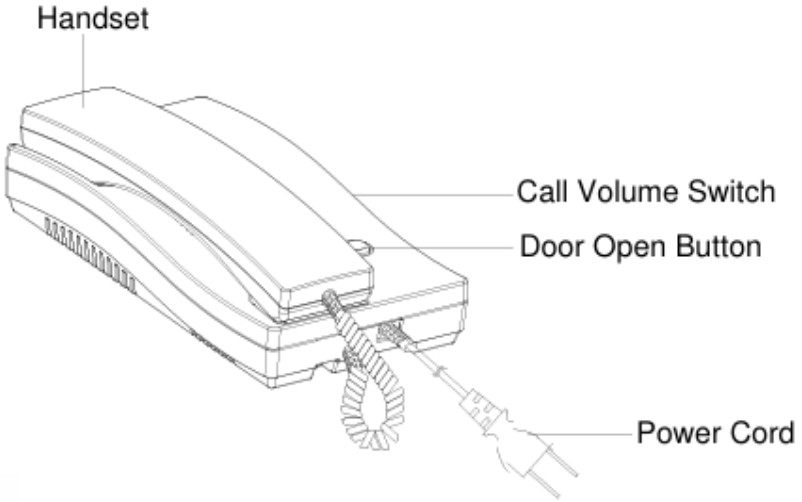

3. Operation


[SUB UNIT]

1. Electric chime call.
2. Back call tone for visitor.
3. Hands free talk within 30cm.


[MASTER UNIT]

1. Lift up handset and talk when a call's coming.
2. Control a call sound with volume control.
3. Door release button able to open the door.

4. Installation

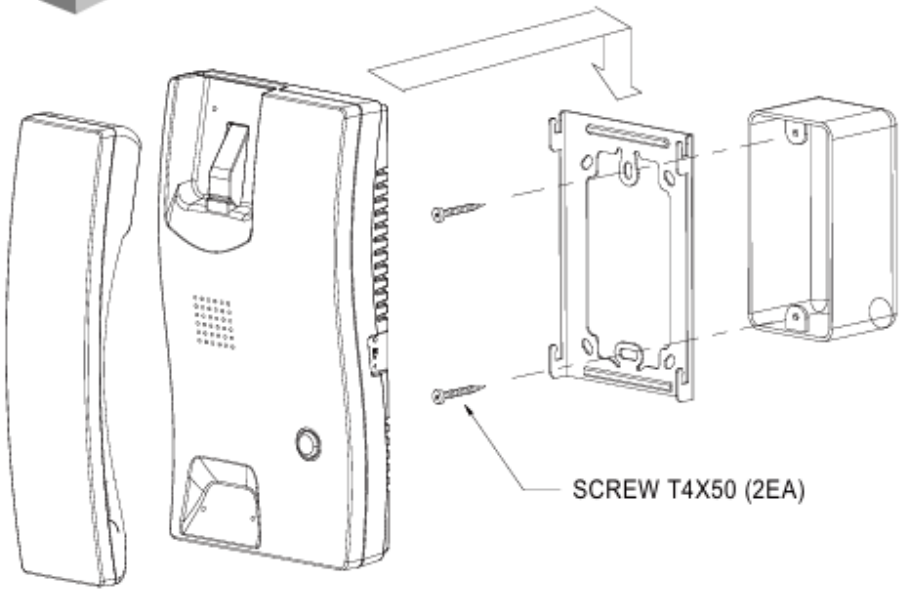

5. Wiring

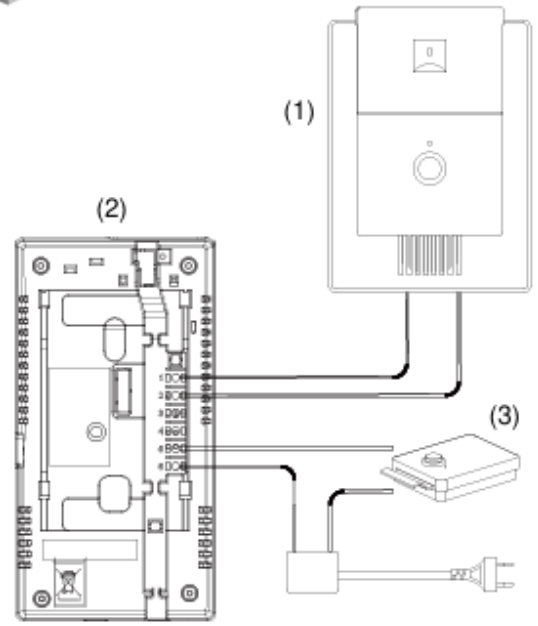

1. Non polarity wiring with Sub Unit(1) and Master Unit (2).
2. Door Release(3) should be provided with additional power source.

6. Specification

Model	DP-2S
Power Source	100/110/120/220/230/240V~, 50/60Hz
Consumption Power	4.5W(MAX)
Distance	100m(Ø0.65mm), 150m(Ø0.8mm)
Wiring	Call : 2-wire, Door Release : 2-wire(Ø 1.6mm Copper wire)
Dimension(mm)	108(W)°X210(H)°X61.4(D)mm
Weight(g)	640g

COMMAX

COMMAX Co.,Ltd.

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Int'l Business Dept. : Tel.; +82-31-7393-540~550 Fax.; +82-31-745-2133
Web site : www.commax.com

Printed In Korea / 2016.04.105