
User Manual


Door Phone DR-201D

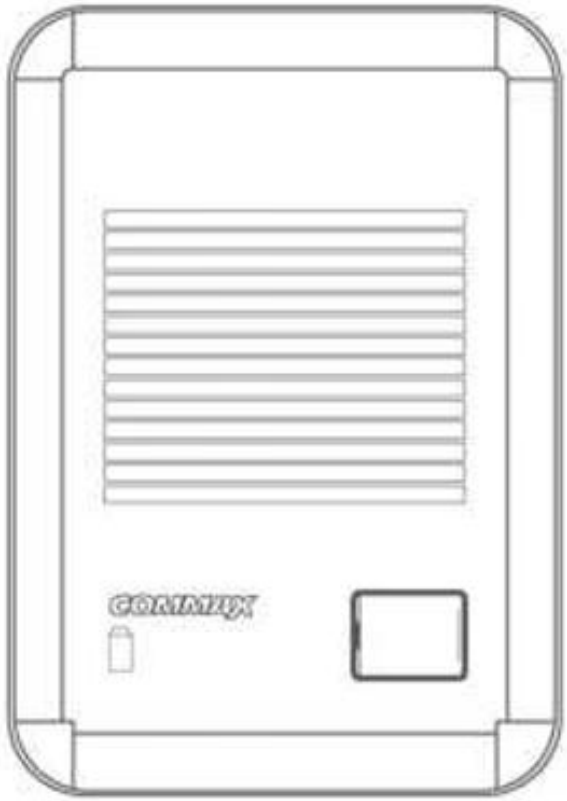

COMMAX Co.,Ltd.


(www.commax.com)

1. Wiring

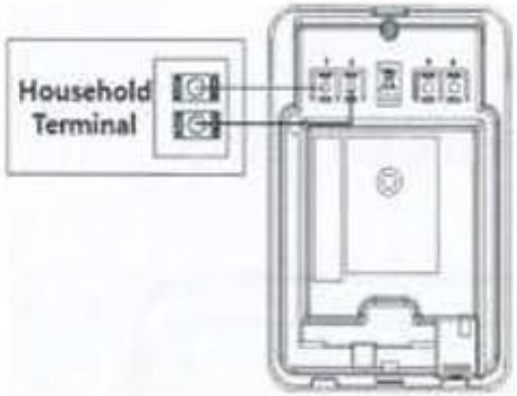

2. Specification

Specification	DR-201D
Rated Voltage	DC 9V (from household unit)
Wiring	2 wires (non-polarity)
Communication	Simultaneous communication
Temperature	-10°C ~ +40°C
Dimension (mm)	101 (W) x 142 (H) x 32 (D)
Distance	0.5φ: 28m / 0.65φ: 50m

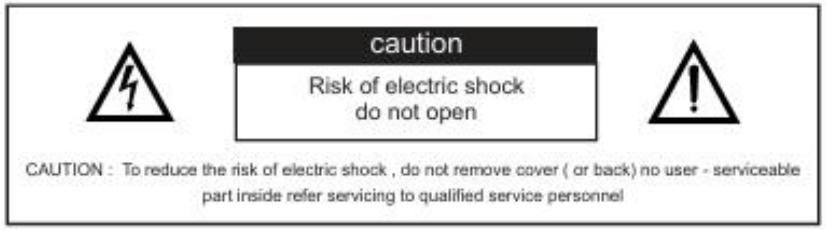

Since 1968

COMMAX
SmartHome & Security

User Manual

DOOR PHONE DP-LA01M,LA01S



www.commax.com

COMMAX Co.,Ltd.

- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

1. Warnings and Caution

To prevent fire or shock hazard, do not expose the unit to rain or moisture.

This symbol is intended to alert the use to the presence of uninsulated **"dangerous Voltage"** within the product' s enclose that may be of sufficient magnitude to constitute a risk of electric shock to persons.

This symbol is intended to alert the use to the presence of important operating and maintemance (servicing) instructions in the literature accompanying the appliance


caution

Risk of electric shock
do not open


CAUTION : To reduce the risk of electric shock, do not remove cover(or back) no user-serviceable part inside refer servicing to qualified service personnel.

2. Overview

DP-LA01M

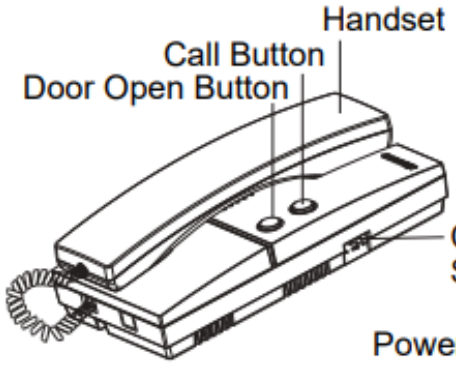

DP-LA01S

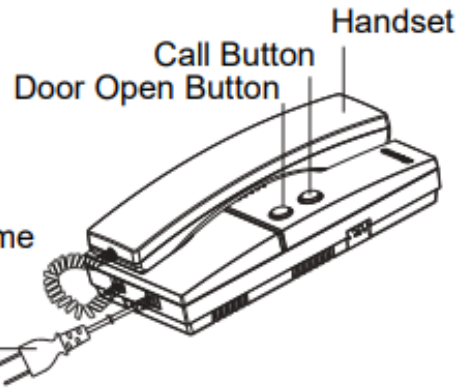

3. Operation

[Communication with the door station]

1. When a visitor press the calling button, both handset Master and Slave ring. (Volume can be adjusted by the switch on the side of handset: only DP-LA01M)
2. Pick up one handset between Master and Slave and start the communication.
3. Check the visitor first and push the door open button to open the door.


3. Operation

[Communication between handset]

DP-LA01M ⇔ DP-LA01S

1. Pick up the handset to call another handset.
(The handset will be called while the button is being pushed.)
2. When other party gets the phone, the conversation begins.
3. If a visitor presses the call button while the handset is being used, the handset will ring
4. Hang up the phone to finish the conversation between handsets and pick it up again to begin the conversation with the visitor.
(If you pick up the handset, it will be connected to the door unit automatically.)

4. Wiring

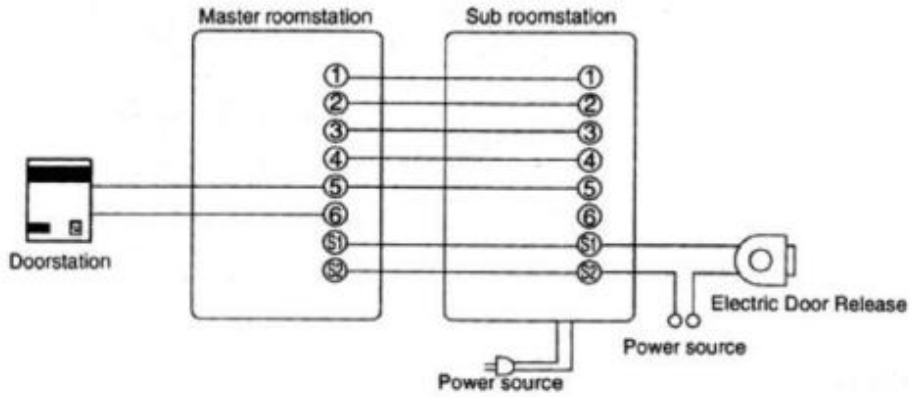

5. Specifications

POWER SOURCE	AC 110/120/220/230/240V,50-60Hz
OUTPUT POWER	Call : High 400mW
	Low 100mW
	Talk : 70mW
DISTANCE	30m, 0.65ø(When talking to Master)
	50m, 0.65ø(When talking to door station)
DIMENSION	DP-LA01M :208(D) X 98(W) X 60(H)mm
	DP-LA01S :208(D) X 98(W) X 65(H)mm
WEIGHT	DP-LA01M : 510g
	DP-LA01S : 675g